

Modern Outdoor LED Wall Light Waterproof Up & Down Sconce for Patio, Garden & Staircase Lighting (IP65)

Slim indoor/outdoor architectural wall light with warm-white facade and pathway illumination

Upgrade indoor and outdoor walls with a long-strip LED sconce combining minimalist form, durable aluminum and acrylic construction, and integrated **COB LED** illumination. The matte-black body produces a warm, inviting light effect while the **IP65** rating protects against rain, dust and moisture for patios, gardens, balconies, entries, corridors and stairways.

IP65 WEATHERPROOF

UP & DOWN LIGHT

INDOOR / OUTDOOR



IP65 - Warm white - Matte black - Wall mounted

KEY PRODUCT DATA

POWER OPTIONS

12W-36W

Four size and output families

INPUT

AC 85-265V

Wide-voltage integrated driver

WEATHER PROTECTION

IP65

Rain, dust and moisture resistant

LIGHT SOURCE

COB LED

Integrated energy-efficient source

MATERIALS

Aluminum + Acrylic

Durable architectural construction

MOUNTING

Wall Mounted

Vertical architectural installation

AVAILABLE CONFIGURATIONS

POWER

12W / 18W / 24W / 36W

LIGHT COLOR

Warm White

BODY FINISH

Matte Black

APPLICATION

Indoor / Outdoor

PERFORMANCE AND CONSTRUCTION

Technical Specification

GENERAL / ELECTRICAL / OPTICAL	
Product type	Modern indoor/outdoor LED wall sconce
Material	Aluminum housing with acrylic diffuser
Input voltage	AC 85-265V
Light source	Integrated COB LED
Power options	12W / 18W / 24W / 36W
Light color	Warm white
Waterproof rating	IP65
Optical output	Front luminous strip with up-and-down wall-wash effect
Mounting	Wall mounted; vertical orientation shown
Body color	Matte black
12W dimensions	6.10 x 2.76 x 2.56 in (15.5 x 7 x 6.5 cm)
18W dimensions	8.66 x 2.76 x 2.56 in (22 x 7 x 6.5 cm)
24W dimensions	14.57 x 2.76 x 2.56 in (37 x 7 x 6.5 cm)
36W dimensions	23.62 x 3.23 x 4.72 in (60 x 8.2 x 12 cm)
Applications	Patios, gardens, balconies, facades, stairways, corridors, hotels and restaurants

SIZE FAMILIES


MODEL / SIZE / REFERENCE COVERAGE

12W	6.10 x 2.76 x 2.56 in 3-5 m2 / 32-54 sq ft
18W	8.66 x 2.76 x 2.56 in 5-8 m2 / 54-86 sq ft
24W	14.57 x 2.76 x 2.56 in 8-12 m2 / 86-129 sq ft
36W	23.62 x 3.23 x 4.72 in 12-18 m2 / 129-194 sq ft

CONSTRUCTION HIGHLIGHTS


- Aluminum body:** Rigid matte-black housing for durable architectural use.
 - COB LED:** Integrated, energy-efficient source with low heat emission.
- Acrylic optic:** Diffuses the luminous face and supports a clean light line.
 - IP65 protection:** Resists rain, dust and moisture for indoor/outdoor use.

OUTDOOR APPLICATION

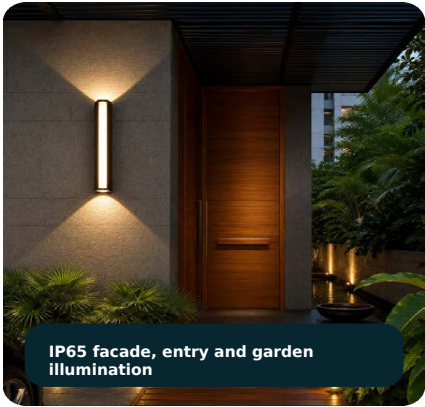

INDOOR / OUTDOOR ARCHITECTURAL ILLUMINATION

Design and Installation

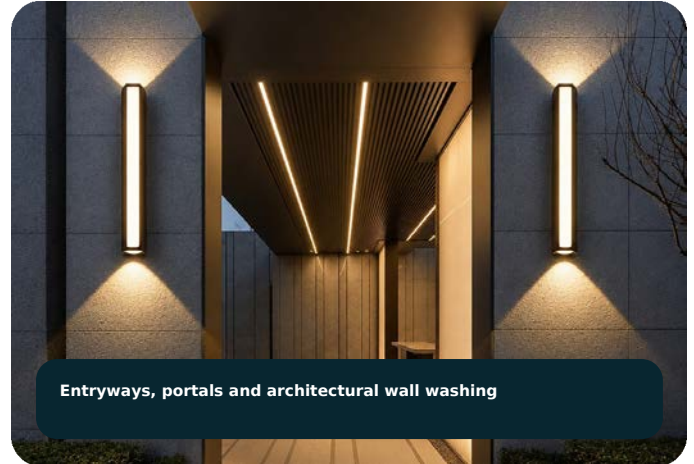

RECOMMENDED INSTALLATION SEQUENCE

1

Isolate power and verify a stable wall, cable route and scheduled model.

2

Confirm the 12W, 18W, 24W or 36W size and the intended vertical position.

3

Secure the mounting base, connect AC 85-265V wiring and seal the cable entry.

4

Attach the fixture, restore power and verify warm-white front and up/down output.



DESIGN GUIDANCE

- **Placement:** Use beside doors, garages, stairways and facade features.
- **Beam effect:** Vertical mounting creates front light plus up/down wall wash.
- **Spacing:** Coordinate fixture spacing with model output and reference coverage.
- **Light color:** Warm-white output creates an inviting residential and hospitality ambience.
- **Weather sealing:** Maintain the IP65 enclosure and seal the cable entry and mounting surface.
- **Surface:** Anchor to a stable wall with fixings suitable for the substrate and fixture weight.
- **Electrical:** Confirm AC 85-265V supply and follow the wiring instructions for the delivered model.
- **Commissioning:** Verify secure mounting, even output and water-resistant seals before handover.


Installation must be completed by a qualified person. Confirm local wet-location requirements and preserve all IP65 seals.

TENDER AND SPECIFICATION SUPPORT

Specification and Selection

SUGGESTED SPECIFICATION CLAUSE

Provide a wall-mounted LED sconce suitable for indoor and outdoor architectural lighting. Luminaire shall comprise a matte-black aluminum housing, acrylic diffuser and integrated COB LED source, with IP65 protection and AC 85-265V input. Provide the scheduled 12W, 18W, 24W or 36W model with warm-white output, a luminous vertical front face and up/down wall-wash distribution. Model dimensions shall be: 12W - 6.10 x 2.76 x 2.56 in; 18W - 8.66 x 2.76 x 2.56 in; 24W - 14.57 x 2.76 x 2.56 in; 36W - 23.62 x 3.23 x 4.72 in. Install vertically on a suitable wall, seal cable entries, and comply with manufacturer instructions and applicable electrical regulations.

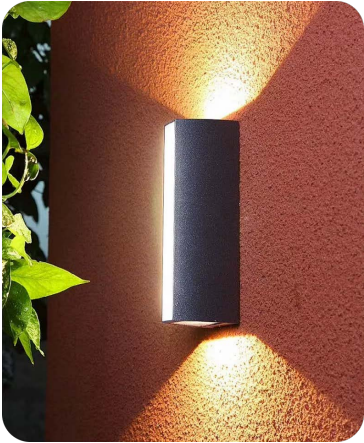

PROJECT SELECTION GUIDE

PRODUCT	Modern outdoor LED wall light / up-and-down sconce
POWER OPTIONS	12W / 18W / 24W / 36W
INPUT	AC 85-265V
LIGHT SOURCE	Integrated COB LED
LIGHT COLOR	Warm white
WATERPROOF	IP65
MATERIAL	Aluminum housing + acrylic diffuser
FINISH	Matte black
MOUNTING	Wall mounted / vertical orientation
OPTICAL OUTPUT	Front luminous strip + up/down wall wash
DIMENSIONS	12W: 6.10 x 2.76 x 2.56 in 18W: 8.66 x 2.76 x 2.56 in 24W: 14.57 x 2.76 x 2.56 in 36W: 23.62 x 3.23 x 4.72 in
REFERENCE COVERAGE	12W: 3-5 m2 18W: 5-8 m2 24W: 8-12 m2 36W: 12-18 m2
APPLICATION	Patio / garden / balcony / facade / stairway / corridor / restaurant / hotel
STYLE	Modern minimalist

Selection note: Confirm the scheduled power, dimensions and site-specific wet-location installation requirements before ordering.